

PRE PRINT

**Title: Rumble Strips or Not
Along Wide Shoulders
Designated for Bicycle
Traffic?**

**Author: Per Garder,
University of Maine**

Rumble Strips or Not Along Wide Shoulders Designated for Bicycle Traffic?

Associate Professor Per Garder
Department of Civil & Environmental Engineering
University of Maine, Orono, Maine 04469
Phone (207)581-2177
Fax(207)581-1215

ABSTRACT

Wide paved shoulders on busy two-lane roads are sometimes designated as bicycle routes. But this shoulder may not be a safe place for bicyclists if inattentive and dozing drivers "use" it too. Preliminary estimates for a road carrying 1,000 vehicles per hour show a fatality rate substantially higher than the average rate for bicycling. To make the shoulder safe, dozing vehicle drivers have to be woken up before they infringe on the bicyclists' part of the shoulder. Continuous shoulder rumble strips have a potential to alert wandering drivers and thus reduce the number of run-off-road automobile crashes as well as enhance the safety of bicyclists and others using the shoulder. A narrow strip which leaves most of the shoulder to the bicyclists is desired. It is important that this remaining part is kept free from debris so that bicyclists are not forced to ride on the rumble area or out in traffic.

BACKGROUND

There are several reasons why bicycling should be promoted. It is a non-polluting form of personalized transportation that can help reduce congestion. Furthermore, bicycling is a form of transportation beneficial to the individual's health as long as injuries are avoided. The National Bicycling and Walking Study (1) therefore set as goals to double current levels of walking and bicycling and to reduce by 10% the number of bicyclists and pedestrians killed and injured in crashes. The recent trend with respect to level of bicycling is somewhat encouraging. The bicycle seems to have gained popularity for recreational purposes over the last few years. For transportation purposes, the trend is mixed. At least some regions have seen increased usage even for commuting purposes, but the nationwide trend is less encouraging. The 1980 census showed that 1.4% of all workers used the bicycle (or other) as their predominant transportation mode to get to work. In the 1990 census, that share had dropped to 0.4% (1). If we want to substitute bicycling for vehicle miles traveled, we have to focus on utilitarian uses. For commuting purposes this doesn't have to mean that the bicycle has to be ridden from door to door. Intermodal trips, where the bicycle is used to get from the home to a transit facility, may also be an effective way to cut pollution, congestion, and vehicle miles traveled.

One of the most frequently cited reasons for not bicycling is fear for safety in traffic (1). Therefore, if we want to make bicycling a more popular transportation alternative it seems logical to try to improve the perceived safety. However, increasing the perceived safety may actually be counterproductive from a safety perspective. *The subjectively experienced difficulty should not be reduced but rather increased (2)* to get fewer crashes per mile ridden. This increased subjective difficulty should be applied to all road users potentially involved in crashes. So, unless motorists and bicyclists are completely separated, neither motorists nor bicyclists should be encouraged to perceive the road as safer than it actually is. This rule is often broken, and that helps explain why partial separation e.g., bike paths that frequently intersect with streets--leads to more crashes per mile ridden than environments where bicycle and vehicular traffic share the same roadway (3). It also explains why design criteria should not be based on what bicyclists *perceive* of as safe, unless our goal is solely to increase bicycling irrespective of injury consequences. However, there is nothing wrong with increasing the perceived safety as long as the "objective" (actual) safety is improved by at least the same amount. Then the result will typically be more riders as well as fewer crashes per mile ridden. How can roads be made safer, both from a subjective and an objective perspective?

To address the question of objective safety, we will early on in this paper review bicyclists' involvement in crashes, both fatal crashes and other injury crashes. Seen in a macro perspective, we should try to eliminate a share of these crashes and at the same time avoid introducing new factors which may lead to new crashes. Steps for reaching this goal probably should include engineering measures as well as educational efforts and encouragement and enforcement activities.

Measures to improve the subjective (perceived) safety include building wide curb lanes, marked bike lanes, and paved shoulders as well as building separate bike paths. Paths seem to be more effective than lanes/paved shoulders if our goal is to boost ridership. This is supported by interview studies as well as by studies of actual behavior. In a 1991 Harris Poll, 46% stated they would sometimes commute to work by bicycle if safe bicycle lanes were available, whereas 53% would if they had safe, separate designated paths on which to ride (1). In the Chicago area, census zones ~ five linear trails exist averaged 15.6% of commuter trips by bicycle, compared to only one percent for the region as a whole (1).

It is difficult to design safe paths which do not have their own right-of-way. And getting a separate right-of-way may be impossible. Then paved shoulders/bike lanes may be the most feasible option (3). It should also be noted that there are bicyclists who prefer to ride on roads shared with automobiles rather than on separate paths. Paved shoulders/bike lanes are typically perceived of as safe as long as vehicle speeds and volumes are relatively low. However, wide

paved shoulders are sometimes designated as bike routes even on very busy two-lane roads. ISTEA funding will probably make this practice substantially more common. This raises the question, is the shoulder of a busy highway a safe place for bicycle riders when inattentive or dozing drivers may inadvertently "use" it too?

OBJECTIVE

The issue this paper focuses on is the safety level for bicyclists on wide paved shoulders in rural areas, and whether these shoulders should be separated from the traveled lane by continuous rumble strips. Wide curb lanes and striped bicycle lanes can in this respect be seen as equal to paved shoulders lacking a separating rumble area.

SHOULDERS AND SAFETY

Paved shoulders give many advantages. An addition of 1.2 m (4 ft) wide paved shoulders on rural, two-lane roads has been shown to reduce run-off-road, head-on, and sideswipe motor vehicle crashes by 29%, while 2.4 m (8 ft) ones yielded a 49% reduction (4). Paved shoulders also save money in maintenance costs since they prevent the traveled lane from degradation. And they do enhance the safety of bicyclists, compared to riding along the same road lacking paved shoulders. But the question is, is this to a level of safety sufficiently high to justify encouraging bicyclists to use paved shoulders on busy rural two-lane roads?

Bicycle Crash Review

There are in the U.S. annually about 850 fatalities in motor-vehicle related crashes among bicyclists (5). This represents about 90% of all fatally injured bicyclists (6). In other words, we would almost fully solve the problem of fatalities if we managed to totally separate bicycle traffic from motor vehicle traffic. To have this as a goal would, of course, be unrealistic. And for reasons mentioned earlier, it is hard to predict the effect of only partial separation.

We know that nationwide about 73% of fatal motor-vehicle-related bicycle crashes happen away from intersections and 36% happen outside urban areas (5). Thus----in theory, at least-the potential number of fatalities that could be avoided if all rural roads had "safe" shoulders seems to be around 240 a year $[(73\%)(36\%)(850)]$. However, some of these crashes happen at junctions with driveways. Shoulders would probably not influence these crashes. Also, there are crashes away from junctions--intersections and driveways--that involve bicyclists crossing the road. And some of the remaining crashes involve a driver who has dozed off. Wide paved shoulders would definitely not guarantee that these accidents were avoided. An in-depth analysis of all fatal bicycle crashes in Maine 1986-91 (7) showed that the bicyclist was going straight along the road in the same direction as the vehicle in only three of fourteen cases.

Annually about 77,000 bicyclists are injured (1) in motor-vehicle related crashes in the U.S. Analysis of all injury crashes in the state of Maine in 1991 shows that 55% of them happened at intersections (7). These would definitely not be eliminated by the construction of wide shoulders. Half of the crashes in between intersections involved a vehicle or bicycle moving in or out of a driveway. Wide shoulders would probably not reduce this number either. The bicyclist was crossing the road away from intersections and not coming from a driveway in 10% of all crashes. Again, wide shoulders would probably have no effect. Only 9% of all crashes involved a bicyclist and a motorist traveling along the road in the same direction away from intersections and driveways. Wide "safe" shoulders would reduce this number. In 3%, the parties were traveling in opposing directions away from intersections and driveways. Wide shoulders would have a potential to reduce this number too, though teaching the bicyclists to ride with traffic may be the most effective measure.

Very few studies have evaluated the effect on bicyclist safety of adding paved shoulders. To be useful, such studies naturally have to be controlled for regression-to-the-mean. Data from Maine (7) indicate that the presence of shoulders does not necessarily make roads safe for bicyclists. Almost half (46%) of all links with bicycle crashes have a shoulder on the right hand side, though often it is narrow, and the type and quality of the surface is typically unknown. On the other hand, only 13% of the crashes happened on roads with a right hand shoulder of 1.8 m (6 ft) or more. Lack of bicycle counts means that these numbers cannot be translated into risk estimates. It is not only the width of the shoulder that indicates how much space is left for bicyclists. The combined width of the traveled way and the shoulders should be considered. The relationship between number of bicycle crashes and total pavement width is illustrated in Figure 1. Very wide pavement width indicates more than two traffic lanes. An analysis shows that only 7% of all bicycle crashes (away from intersections) were reported on roads with more than two lanes (2% on 3-lane roads, 2% on 4-lane, 1% on 5-lane and 1% on 7-lane ones). This does not mean that multi-lane roads are safe, but rather that most bicyclists ride on two-lane roads.

Figure 1 not available in the online report.


Shoulders used by bicyclists should have a high pavement standard and be kept free from debris and obstacles, including motor vehicles. This is especially important if the shoulder is designated for bicycle traffic. Parked vehicles can be accepted in emergency situations. Moving motor vehicles are more of a threat to the safety of bicyclists. There are many reasons why motorists enter shoulders. A few states permit regular use of shoulders for slow-moving vehicles, and other states permit it under certain conditions. And there is a lot of illegal use. For example, vehicles turning left at T-intersections lacking left turn lanes are sometimes passed on the right by vehicles using the shoulder. This type of situation is dangerous, but the greater threat to the safety of bicyclists is probably the non-deliberate use of shoulders by inattentive or dozing drivers. Inattentiveness can be caused by a driver talking to a passenger, trying to read a map while driving or looking out a side window. The inattentive driver can be made aware that he is drifting onto the shoulder with visual, auditory, or tactile (vibratory) signals. It has been shown that tactile signals give the quickest response. What to do about dozing drivers is addressed below.

FREQUENCY WITH WHICH DRIVERS DOZE OFF WHILE DRIVING

Reports based on police-recorded accidents give clues to how often people have accidents as a result of dozing off, but this information is most likely biased because people are not likely to report the true cause of an accident which is sleep-related. In fact, the accident may not be reported at all, especially if it doesn't involve a second party and takes place on a minor rural road. It may be possible to capture these accidents in other ways, e.g., through interview studies or with the use of questionnaires distributed among randomly chosen drivers. According to Dillman (8), who commonly is quoted as an expert on interview techniques, people tend to give "socially acceptable answers" "in face-to-face interviews, whereas people are more apt to tell the

Rumble Strips or Not Along Wide Shoulders Designated for Bicycle Traffic? Preprint for 74th Annual TRB Meeting. Page 5
truth if the survey is done in a way that ensures anonymity. This is probably especially true if admitting the truth may reveal embarrassing or even criminal behavior. We therefore chose to use questionnaires for collecting this data. These were distributed in the state of Maine during 1993. A total of 205 drivers participated. Below is a summary of the results. Details are presented in a separate paper (9).

The average incident rate of dozing off while driving was around once every 45,000 km (28,000 miles) among randomly selected drivers. Younger drivers (<25 yrs) are significantly more prone to falling asleep than other groups (<0.1%). Almost every second person (36 out of 79) below age 25 has been asleep behind the wheel during the last 12 months. Their incident rate is

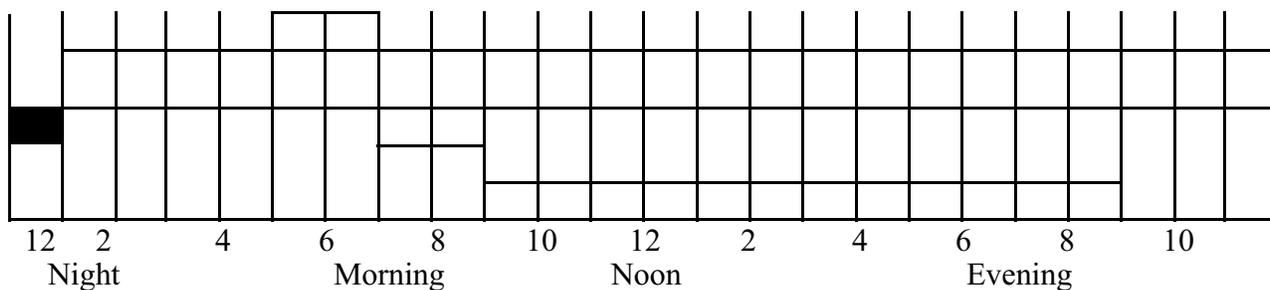

Relative frequency of incidents is defined as share of incidents reported during a specific time period divided by the portion this time period constitutes. The fact that traffic volumes vary between these time periods is not taken into account.

Figure 2 Time of day when most severe incident happened

Traffic Volume

The traffic at the time of the incident was usually very light; 53% report an incident where they were more or less alone on the road. However, traffic volume is strongly correlated to time of day. It would be purely speculative to further reduce the incident rate because of higher than average traffic volumes during the times bicyclists typically ride. And, maybe what we should do is the opposite, i.e. increase the rate some during times when people ride bicycles. In a section below, Analysis of Sleep-Related Fatal Accidents, I present an accident analysis of fatal accidents on Maine's Interstate system showing that most sleep-related accidents happen in the summer and in the daytime.

Location When Waking Up

This analysis is to evaluate whether the driver actually infringed on the shoulder or not before waking up. If he or she did, continuous shoulder rumble strips would be fully effective if they produced enough rumble to wake up the dozing driver, and his reaction was to get back onto the traveled way before infringing on the part used by bicyclists.

In 62% of the incidents the driver didn't wake up until after he or she had left the traveled lane. In three out of four of these cases, the driver had drifted off to the right.

Rate of Dozing Off and Drifting Onto Shoulders of 2-lane Roads in the Daytime

Our best estimate of how often a random Maine driver leaves the traveled way as a result of falling asleep and drifts off onto either of the shoulders before waking up is about once every 206,000 km $[(45,000)/(.80)/(.44)/(.62)]$ (once every 128,000 miles). This rate assumes that the road is lacking devices for waking the driver back up before infringing onto the shoulder. With such devices, these situations could practically be eliminated.

Of the fatal accidents on Maine's Interstate system from 1989 to 1993, 42% (33/79) were caused by a driver *definitely* or *very probably* having fallen asleep. The investigating officers have for these accidents either indicated "driver apparently fell asleep" or noted that the driver or a passenger said that the driver had fallen asleep. The 79 fatal accidents actually killed 94 people; 45 of them died in sleep-related accidents. Table 1 shows what time of day these sleep-related

fatal accidents occurred.

Table 1 Time of day for fatal sleep-related accident on Maine's interstate system

Time	morning						afternoon			evening		
	0-2	2-4	4-6	6-8	8-10	10-12	12-2	2-4	4-6	6-8	8-10	10-12
No. of accidents:	4	0	4	1	2	2	5	8	1	3	2	1

Table 2 shows that most fatal sleep-related accidents happen in the summertime. Again, if people ride bicycles from may to October (typical in Maine) the frequency should be adjusted towards higher values per mile.

Table 2 Month of fatal sleep-related accident on Maine's interstate system

Month	Jan.	Feb.	March	April	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
No. of acc:	0	3	2	1	5	5	8	3	1	2	1	1

THE RISK OF A SLEEP-RELATED BICYCLE CRASH ON ROADS WITH CONTINUOUS SMOOTH PAVEMENT WITHOUT SEPARATION OF TRAVELED WAY AND SHOULDER

Bicyclists may have several types of crashes when they ride along a road on a paved shoulder. These include single bicycle accidents as well as collision accidents with other bicyclists, with parked or slow moving cars, or farm equipment. Severe injury and fatal bicycle crashes typically involve a motor vehicle traveling at more than minimum speed. Along a road with paved shoulders, such collisions can occur if the bicyclist leaves the paved shoulder, for example, to swerve around a pothole. More often such a collision is the result of a motorist infringing onto the shoulder. This can be a voluntary movement, for example, when a motorist turns into or leaves a driveway or passes a left turning vehicle on the right hand side. In some regions it is also common practice to use the shoulder for letting faster traffic pass, especially among heavy vehicles on steep grades lacking climbing lanes. The shoulder infringement can also be an involuntary movement resulting from the driver going too fast to control the vehicle, being inattentive, or having dozed off. Below is a risk estimate for this last type of crash. This estimate gives, of course, only a fraction of the total risk that a bicyclist is subjected to.

Let us assume that a bicyclist rides on a paved shoulder with high quality pavement and no separating continuous shoulder rumble strips along a busy road for one hour; that he travels about 16 km (10 miles); and is passed by about 1,000 vehicles. The likelihood of someone dozing off over this section would be about 7.8%, using the estimate that drivers fall asleep once every 206,000 km in the daytime on two-lane roads. In-depth interviews with a limited number of drivers having fallen asleep and gone off the road indicate that often the vehicle travels for quite a long distance before leaving the paved roadway. The angle with which the car goes off

Rumble Strips or Not Along Wide Shoulders Designated for Bicycle Traffic? Preprint for 74th Annual TRB Meeting. Page 8
 the road is another argument for this. According to the Illinois Division of Highways, the average angle for run-off-road accidents is 3 degrees (12). This means that a car travels just over 45 meters (150 ft) on the shoulder if the shoulder is 2.5 meters (8 ft) wide before hitting the

pavement edge. A 1.8 meter (6 ft) wide car will in average occupy 50% of the width of the shoulder over these 45 meters. With these assumptions, and assuming that 3 out of 4 drivers veer to the right, we get a risk around 1 in 12,000 $\{(0.078)(150/52,800)(3/4)(0.5)\}$ that the bicyclist will be hit from behind by a dozing driver. And the chance that the injuries would be fatal is high. Our assumptions may not be fully realistic. Our road may not be typical. It may have somewhat more vehicle traffic than the average road with paved shoulders. The risk of falling asleep may decrease in heavy traffic flows, but not as dramatically as one might think. Half the incidents reported in our survey took place on roads with at least "some" traffic. Bicyclists may not use the full width of the shoulder, and therefore may not have a potential to be hit on more than a fraction of the 150 ft section; and, finally, some bicyclists may be observant of traffic from behind and evade a collision by leaving the roadway altogether when a car enters the shoulder behind them. An extreme "low estimate" of the actual risk of a collision---taken as 10% of the calculated number---still produces a risk of collision of 1 in 120,000.

What is the likelihood that such a collision would prove fatal? A German study (13) shows that the probability of death for a pedestrian hit by a car is closely related to the collision speed of the passenger car. It gave the following relationships between collision speed and death probability: 20 km/h (12 mph)=10%, 30 km/h (19 mph)=20%, 50 km/h (31 mph)=60%, 80 km/h (50 mph)=98%. A study of death probabilities among Maine bicyclists supports similar death rates among bicyclists (7). Motorists dozing off on rural roads normally continue with high speeds after dozing off. A 50% chance that the injuries prove fatal seems rather conservative. This gives a fatality rate around 250×10^{-8} fatalities per bicycle-km (40×10^{-8} per bicycle-mile) if we use our "best" estimate. The fatality rate would be 25×10^{-8} fatalities per bicycle-km (40×10^{-8} per bicycle-mile) if we use the extreme low estimate. Even this latter rate is substantially higher than the rate for average bicycling, see section below, and this estimate doesn't include fatalities caused by vehicles drifting onto the shoulder for other reasons than the driver being asleep, or by vehicles traveling in the opposing direction. It would probably be safer for the bicyclists to use a low volume, low speed, parallel road even if it lacks shoulders altogether. However, if we make use of a way to wake up vehicle drivers before they infringe on the bicyclists' part of the shoulder the situation could be improved considerably.

The example above has illustrated the risk of riding on the shoulder of a two-lane road. In some states bicycling is allowed on Interstate shoulders. Here the risk of a fatal sleep-related crash is almost four times higher than on a two-lane road carrying the same traffic volume. A separating device becomes a necessity.

Average U.S Fatality Rate for Bicycling

Average fatality rate for the U.S. is about 15×10^{-8} per km (24×10^{-8} per mile). This has been estimated using 856 fatalities in 1990(5); while total distance traveled by bicycle according to the National Bicycling and Walking Study (1) amounted to about 5.5×10^9 km (3.4 billion miles) in 1990. Other studies indicate that the amount ridden by bicycle is higher, or about 22×10^9 km (13.5 billion miles) in 1990---calculated as the average of low and high estimates of the report "Environmental Benefits of Bicycling and Walking in the United States" (14). That would give an average U.S. fatality rate around 4×10^{-8} per km (6×10^{-8} per mile).

HOW TO STOP DOZING DRIVERS FROM DRIFTING ONTO SHOULDERS

Driver monitoring systems and automatic guidance systems resulting from the massive IVHS research currently undertaken will eventually eliminate most accidents caused by people falling asleep while driving. But, even if those devices are on the market relatively soon, it will take at least another ten to fifteen years before most vehicles are equipped with them. Cost-effective ways of reducing the problem in the interim would save many lives. These could focus on keeping sleep-prone drivers off the road, keeping them awake while they drive, or waking them up before they cause an accident.

The group of people who are sleep-prone is so large that it would be impossible to keep them off the road completely. Thus a combination of the other strategies will have to be used.

Measures preventing drivers from actually falling asleep include medical treatment of people suffering from sleep apnea, driver education/information, and design efforts by engineers, e.g., building roads with shorter tangents, "rhythmic" alignment and appealing vistas at irregular but short distances, and, if that is impossible, providing artificial "eye-openers" such as art exhibitions along the road (tried along French Autoroutes) as well as providing rest areas reasonably spaced.

The third category--waking people back up before they cause an accident--is where our research effort is concentrated. Today, small devices are available that can be clipped onto the ear which supposedly awaken the nodding driver, but most drivers will probably never use them, nor do these devices seem very effective. Eventually, "smart cars" will monitor drivers but until then other measures will have to be used. The most effective may be physical measures. We feel that highway engineers too often conclude that an accident caused by a driver dozing off could not have been averted through engineering measures. However, we believe that a simple, relatively inexpensive technique--continuous shoulder rumble strips--is a very effective physical measure, which will decrease the likelihood of all accidents caused by dozing or inattentive motorists, not just those involving bicyclists.

USE OF SHOULDER RUMBLE STRIPS ON TWO-LANE ROADS

The Departments of Transportation of all 50 states were surveyed to find out whether continuous shoulder rumble strips are used along 2-lane, 2 directional highways.

The use of continuous rumble strips along other roads than limited access highways is fairly limited. Thirty-five states have no practice on two-lane roads, and only a small fraction of the network has been treated in the remaining fifteen states. Alabama's policy is to use continuous rumble strips to separate lanes for car traffic from shoulders designated for bicyclist/pedestrian use. Arizona treats all shoulders of rural divided and undivided roadways where pavement width including shoulder exceeds 10.4 meters (34 ft). In California, the policy is that rumble strips are *not* to be used where bicyclists use the shoulder unless there is 1.5 meters (5 ft) clear shoulder left on outer edge. In Colorado, the informal policy is to roll strips into all bituminous overlays as well as in new construction of all portland cement concrete highways. In Georgia, continuous shoulder rumble strips are used on all paved shoulders that are at least 1.2 meters (4 ft) wide. In Idaho, rumble strips are to be considered on primary highways with a history of run-off-road accidents. In Cook's County, Illinois, which encompasses the city of Chicago, shoulder rumble strips have been used for 20 years on "all" resurfacing projects, and more than a third of the network has been treated. Now, noise pollution and some opposition from bicyclists have slowed down new treatment. In Kansas, two-lane rural roads are treated if shoulders are wider than 1.8 meters (6 ft). Kentucky reports that since 1988 shoulder rumble strips have been added to resurfacing, rehabilitation, and new construction on all roads with wide paved shoulders and narrow shoulders if placed monolithic. In Missouri, all roads with portland cement concrete shoulders or bituminous lift at least 45 mm (1.75 inches) thick and at least 1.2 meters (4 ft) wide get continuous shoulder rumble strips as long as the shoulder is not expected to become a travel

lane. In Nevada, all rehabilitation and overlay projects require rumble strips if the shoulder is 1.2 meters (4 ft) or wider. In New Mexico, all rural highways get rumble strips when they are improved, except for smaller projects, projects in mountainous terrain with many curves, or if shoulders are less than 2.4 meters (8 ft) wide and used by many bicyclists. In Pennsylvania, shoulders are treated if there are many run-off-road accidents and the shoulder is at least 2.4 meters (8 ft) wide. In Utah, all 2-lane 2-way roads with safety problems or design speed more than 50 mph and at least 1.2 meters (4 ft) shoulder get rumble strips in connection with reconstruction. In West Virginia, all US and state routes with bituminous pavement get rumble strips if shoulders are at least 2.4 meters (8 ft) wide (or adjacent to ramps and climbing lanes that have shoulders at least 0.9 meter (3 ft) wide).

Adverse Effects of Continuous Shoulder Rumble Strips

One problem associated with rumble strips is noise pollution. This ought not be a problem for shoulder rumble strips, since these are not supposed to be traversed except for in an emergency situation or when a vehicle has left its normal path for some other reason. However, several agencies report noise to be a problem in built up areas, and even for individual houses in rural areas especially in the summer when windows are left open. Noise problems particularly from trucks were reported by the Pennsylvania Turnpike Commission and by the State of Wisconsin even on roads where the strip was removed 0.75 meters (2'-6") from the traveled lane. Roads in the Milwaukee area are for this reason not treated, whereas all other segments of the Interstate system in Wisconsin are. A spokesperson for the Wisconsin Department of Transportation thinks the problem may be lessened when the novelty of shoulder rumble strips makes it less common for truck drivers to purposely "play" with them.

Another problem reported with continuous shoulder rumble strips is the risk that a motorcyclist or bicyclist can have an accident as a result of a wheel getting caught at the edge of a rumble strip which may interfere with the steering of the bike. This problem was recently echoed by an NCHRP Synthesis Report on the use of rumble strips to enhance safety (15). However, no accident data seem to support this fear. Motorcyclists have for years been traveling along Interstates with continuous shoulder rumble strips without accident problems. And, a test by Massachusetts State Police on the Mass Turnpike (16) showed that there were no maneuverability problems for motorcycles traversing the milled-in strip [18 cm (7") longitudinal cut with circle segment profile, spaced at 30 cm (12") with 41 cm (16") transversal width, and a depth of 13 mm (1/2") to 16 mm (5/8"), and typically removed about 10 cm (4") from the shoulder line]. In contrast, grooving of the traveled way parallel to the direction traveled (for drainage reasons) has caused numerous motorcycle crashes.

The author, together with 20 students and staff (age varying from 16 to 65), have tested what it is like to ride a bicycle across and along milled-in rumble strips—both ground-in 18 cm (7") long, 13 mm (1/2") deep circular ones, and narrower rectangular ones 13 mm (1/2") deep. Several types of bicycles were used, including narrow wheel road racing bikes. Not a single rider reported any tendency to lose control at any speed or any angle even when not holding on to the handlebars. But every rider reported that riding on the rumble strips was annoying. My conclusion is that there is absolutely no danger if a bicyclist by mistake gets into the rumble area, or has to swerve into it to pass broken glass. But if the shoulder is badly maintained, so that the rider cannot ride on it for long distances, the alternative most bicyclists will choose is to go out onto the traveled way rather than use the rumble strip itself. If the rumble strip is put into the only usable 60 cm (2 ft) of shoulder, the rider will move out 60 cm (2 ft) to the left, to a more dangerous location. But, if the usable shoulder is 90 cm (3 ft) or more and a 45 cm (18") rumble strip is put in, the remaining 45 cm (18") will be sufficient for riding in as long as it is kept relatively free of debris. An effective narrower rumble strip that doesn't infringe so much into the bicyclists' area would be preferable to the 45 cm (18") one. Further research should test if such a narrow design is efficient in waking a dozing driver. Rolled-in strips probably do not create any

problems for bicyclists since they are much shallower than the milled-in types that were tested. However, neither are they as effective in waking the dozing driver.

CONCLUSIONS

Wide paved shoulders on busy two-lane roads are sometimes designated as bike routes. ISTEA funding will probably make this practice substantially more common. But this shoulder may not be a safe place for the bicycle rider as long as inattentive and dozing drivers inadvertently "use" it too. Lack of bicycle counts makes it impossible to use empirical data for calculating risks. Instead, certain assumptions have had to be made. Based on these assumptions, calculations show that the accident risk on paved shoulders of busy roads is several times higher than that of average bicycling, if the shoulder isn't separated from the traveled lane by a device that wakes up the dozing driver. The most efficient device is probably a continuous shoulder rumble strip.

Alabama already has the policy of using continuous rumble strips to separate lanes for car traffic from shoulders designated for bicyclist/pedestrian use; other states have the opposite policy, to avoid using rumble strips where there is substantial bicycle traffic. The reasons for this latter standpoint are that they feel that a bicyclist might have maneuverability problems if he or she gets a wheel into the rumble strip and that the remaining part of the shoulder is difficult to keep free of debris. Tests carried out in this project do not support the fear that continuous shoulder rumble strips will cause maneuverability problems. However, further research should be initiated to find an effective narrower design that infringes less than 18 inches into the "bicyclists" area and still remains efficient in alarming a dozing motorist. Maintenance is important even with a narrower design or with no rumble strip at all. A bicycle rider on a road with paved shoulders designated for bicycle traffic should in my opinion never be forced to ride closer than 30 cm (12") from the traveled lane.

REFERENCES

1. *The National Bicycling and Walking Study: Final Report*. Publication No. FHWA-PD-94-.023. U.S. Department of Transportation, Washington D.C., 1994.
2. J. Steenberg. Local Prevention of Accidental Road Traffic Deaths. *Accident Analysis & Prevention* Volume 26, Number 1, pp 1-9, February 1994.
3. P. Garder, L. Leden & T. Thedeem. Safety Implications of Bike Paths at Signalized Intersections. *Accident Analysis & Prevention* Volume 26, No.4, pp 429-439, 1994.
4. C.V. Zegeer and F.M. Council. Safety Effects of Cross-Section Design. In: *Compendium of Safety Effectiveness of Highway Design Features*. McLean, VA. Federal Highway Administration, 1991.
5. *FARS 90. Fatal Accident Reporting System 1990*. National Highway Traffic Safety Administration, U.S. Department of Transportation, DOT HS 807 794, December 1991.
6. J. F. Kraus, D. Fife, and C. Conroy. Incidence, Severity, and Outcomes of Brain Injuries Involving Bicycles. *American Journal of Public Health* 77:76-78, 1987.
7. P. Garder. Bicycle Accidents in Maine: An Analysis. Presented at the 73rd Annual Meeting of TRB in 3anuary 1994. Accepted for publication in *Transportation Research Record* (manuscript no.940328).
8. D. A. Diliman. *Mail and Telephone Surveys: The Total Design Method*. John Willey and Sons, New York, N.Y., 1978.
9. P. Garder and J. Alexander. Fatigue Related Accidents and Continuous Rumble Strips. Paper submitted to TRB Committee on Traffic Control Devices (A3A02) for presentation at the 74th Annual Meeting of TRB in January 1995.
10. *Selected Highway Comparisons by Functional Class 1990-1992*. State of Maine. Maine Department of Transportation. April 1993.
11. Institute of Transportation Engineers. *Traffic Engineering Handbook*, 4th Edition, Prentice Hall, New Jersey, 1992.
12. *Portland Cement Concrete Shoulders*. Illinois Divisions of Highways, Research and Development Report No.27. July 1970.
13. W. Teichgraber. Die Bedeutung der Geschwindigkeit fur die Verkehrssicherheit. *Zeitschrift fur Verkehrssicherheit* 2. Heft, II Quartal 1983.
14. C. Komanoff, C. Roelofs, J. Orcutt, and B. Ketcham. Environmental Benefits of Bicycling and Walking in the United States. *Transportation Research Record* 1405. TRB, National Research Council, Washington D.C., 1993 pp.7-12.
15. Use of Rumble Strips to Enhance Safety. NCHRP Synthesis 191, Transportation Research Board Washington, D.C. 1993.
16. Telephone information by J. D. Johnson, Product Manager of Surface Preparation Technologies, Mechanicsburg, PA. July 1994